

ROUND Series Down Light Operation Instruction

Thanks for using our products. Please read this instruction carefully before installing this down light and keep this instruction for reference.

General Information

Basic Functions: local lighting, focus lighting, ambient lighting, office lighting;

Application Areas: house, shopping mall, hotel, museum, library, etc;

Technical Data:



Product Name	Specification	Size	Voltage	Frequency	Power Consumption	Cut Out Size
Round Series Down Light	2 "	φ 68x78mm	200-240Vac	50/60Hz	5W/8W	φ 55mm
	3 "	φ 85x90mm	200-240Vac	50/60Hz	10W/12W	φ 75mm
	3 "	φ 85x105mm	200-240Vac	50/60Hz	15W/20W	φ 75mm
	4 "	φ 105x117mm	200-240Vac	50/60Hz	25W/30W	φ 95mm

Warnings

- ※ Need to be installed, checked and repaired by professional electrician.
- ※ Make sure to connect with proper voltage and install according to the instruction so that the down light will work.
- ※ For safety purpose, cut off the power and operate after lamp cooling before installing or removing the lamp.
- ※ Don't install the down light to the unstable ceiling or combustible materials.
- ※ Cut off the power if there is any abnormal phenomenon.
- ※ Do not transform the lamp or change the components.
- ※ Do not use the lamp under the condition of direct sunlight, humidity, fog, rain and corrosive gas, explosive gas, dust, liquid.

CE CB RoHS

Wire Connection

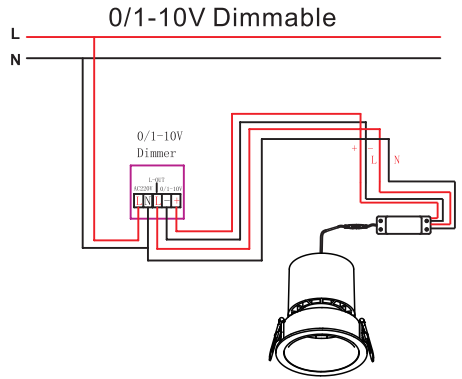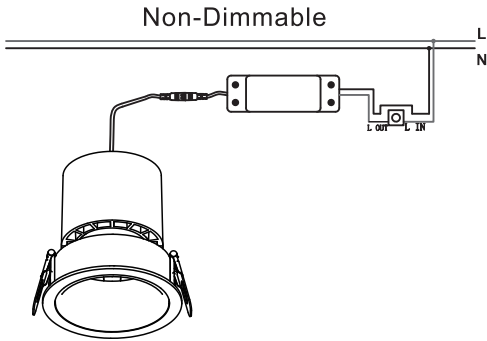

Installation Instruction

1.



Dig the round hole in the ceiling according to the cut out size.

2.



Connect with AC cable

3.



Recessed luminaire into the ceiling.

4.



Power on and done.